




Double Acting Cylinder

2"

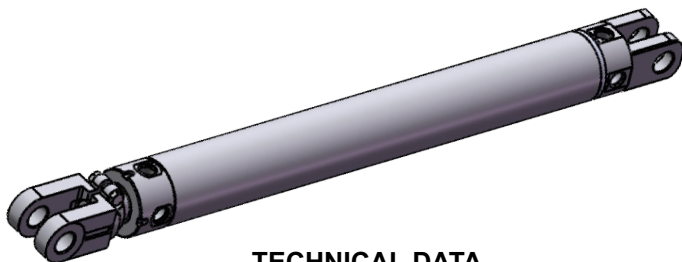

TECHNICAL DATA

MAX WORKING PRESSURE	TEMPERATURE RANGE	MAX SPEED
200 bar	2900 psi	-30°C – +90°C
		0.5 m/sec


SPARE PARTS

CODE	DESCRIPTION
SKAR20	Seal Kit 2.0" Agram
CPC25125	Rod Clevis Pin & Clip 2 1/2" & 3"

ORDER CODE

AR XX XXX XXX X X

Basic Serial Number _____ Production
Bore _____ Port Position
Rod Diameter _____ Stroke _____
1 = Standard
2 = Production Special

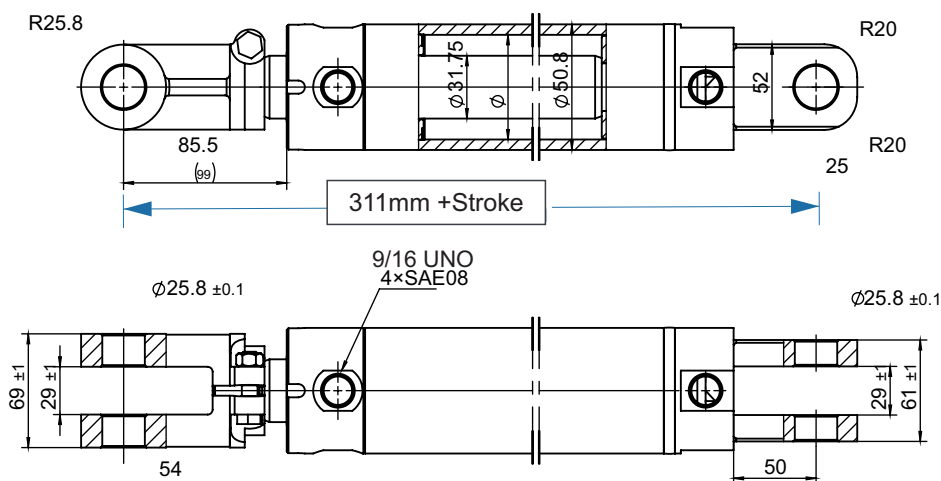

CODE	STROKE		PIN TO PIN				PIN DIAMETER	PORT SIZE	WEIGHT (kg)
			CLOSED		OPEN				
	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
AR20125008A1	203	8	514	20.2	717	28.2	1"	9/16" UNO	7.5
AR20125010A1	254	10	565	22.2	819	32.2			8.1
AR20125012A1	305	12	616	24.2	921	36.3			8.7
AR20125016A1	406	16	717	28.2	1123	44.2			10.0
AR20125018A1	457	18	768	30.2	1225	48.2			10.7
AR20125020A1	508	20	819	32.2	1327	52.2			11.3
AR20125024A1	610	24	921	36.2	1531	60.3			12.6
AR20125030A1	762	30	1073	42.2	1835	72.2			14.5
AR20125036A1	914	36	1225	48.2	2139	84.2			16.5
AR20125048A1	1219	48	1530	60.2	2749	108.2			20.4



QUEENSLAND:

64 Success Street,
Acacia Ridge
(08) 3216 7855

VICTORIA:

(03) 8336 1346


info@gfr.net.au

www.gfrindustries.com.au



Double Acting Cylinder

2.5"

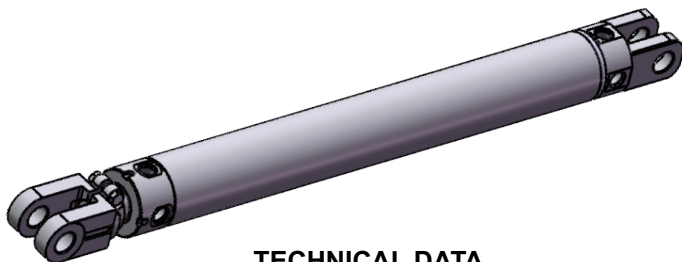

TECHNICAL DATA

MAX WORKING PRESSURE	TEMPERATURE RANGE	MAX SPEED
200 bar 2900 psi	-40°C – +110°C	1 m/sec


SPARE PARTS

CODE	DESCRIPTION
SKAR25	Seal Kit 2.5" Agram
CPC2515	Rod Clevis Pin & Clip 2 1/2" & 3"

ORDER CODE

AR XX XXX XXX X X

Basic Serial Number _____ Bore _____ Rod Diameter _____ Stroke _____ Port Position _____ Production
 1 = Standard
 2 = Production Special

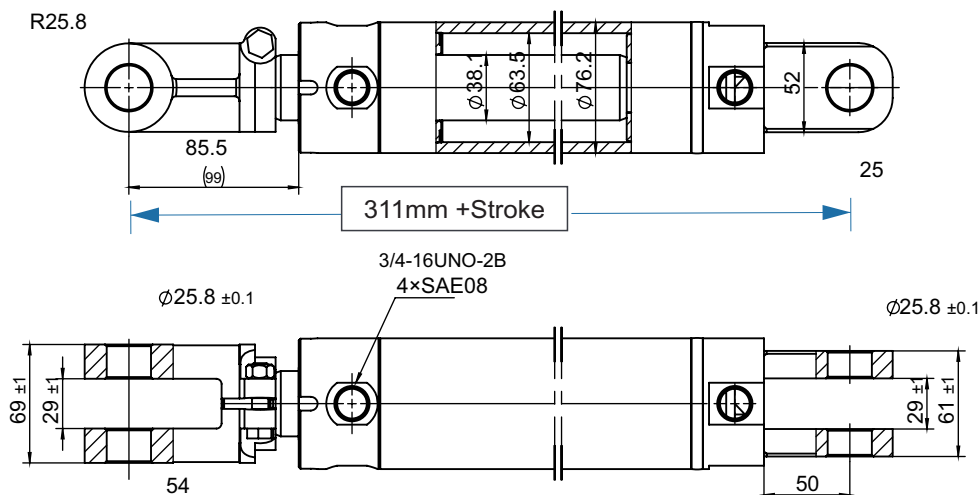

CODE	STROKE		PIN TO PIN				PIN DIAMETER	PORT SIZE	WEIGHT (kg)
			CLOSED		OPEN				
	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
AR2515008D1	203.2	8	514.2	20.25	717	28.2	1"	3/4" UNO	12.3
AR2515010D1	254	10	565	22.25	819	32.2			13.2
AR2515012D1	304.8	12	615.8	24.25	921	36.3			14.0
AR2515014D1	355.6	14	666.6	26.25	1021	40.2			14.9
AR2515016D1	406.4	16	717.4	28.25	1123	44.2			15.7
AR2515018D1	457.2	18	868.2	30.25	1225	48.2			16.6
AR2515020D1	508	20	819	32.25	1327	52.2			17.4
AR2515024D1	609.2	24	920.6	36.25	1531	60.3			19.2
AR2515030D1	762	30	1073	42.25	1835	72.2			20.5
AR2515036D1	914.4	36	1225.4	48.25	2139	84.2			24.3
AR2515048D1	1219.2	48	1530.4	60.25	2749	108.2			26.0



QUEENSLAND:

64 Success Street,
Acacia Ridge
(08) 3216 7855

VICTORIA:

(03) 8336 1346


info@gfr.net.au

www.gfrindustries.com.au



Double Acting Cylinder

3"

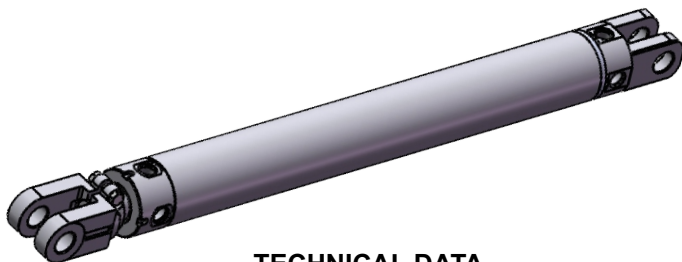

TECHNICAL DATA

MAX WORKING PRESSURE	TEMPERATURE RANGE	MAX SPEED
200 bar 2900 psi	-40°C – +110°C	1 m/sec


SPARE PARTS

CODE	DESCRIPTION
SKAR30	Seal Kit 3.0" Agram
CPC2515	Rod Clevis Pin & Clip 2 1/2" & 3"

ORDER CODE

AR XX XXX XXX X X

Basic Serial Number _____ Production
Bore _____ Port Position
Rod Diameter _____ Stroke _____
1 = Standard
2 = Production Special

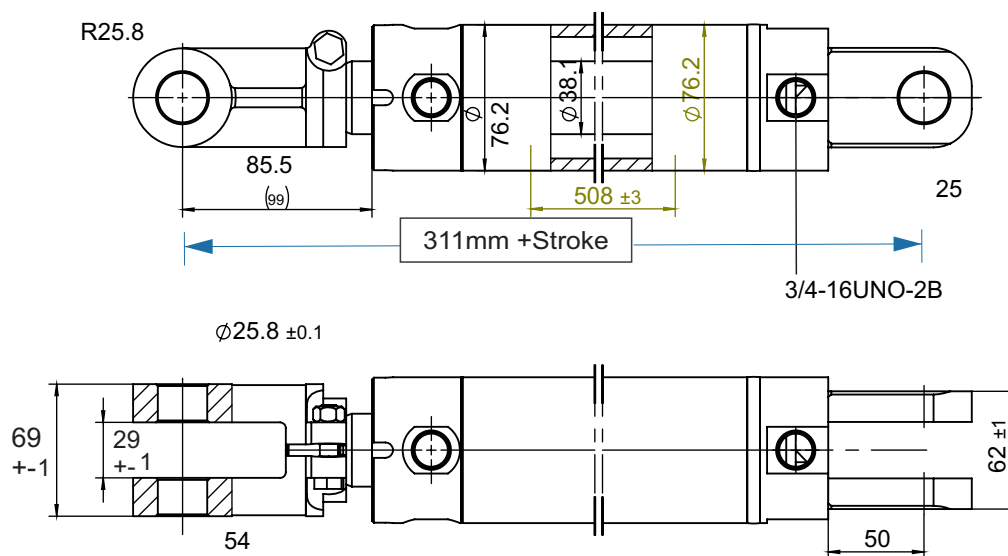

CODE	STROKE		PIN TO PIN				PIN DIAMETER	PORT SIZE	WEIGHT (kg)
			CLOSED		OPEN				
	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
AR3015008D1	203.2	8	514.2	20.25	717	28.2	1"	3/4" UNO	15.8
AR3015010D1	254	10	565	22.25	819	32.2			16.9
AR3015012D1	304.8	12	615.8	24.25	921	36.3			18.0
AR3015016D1	406.4	16	717.4	28.25	1123	44.2			20.2
AR3015018D1	457.2	18	868.2	30.25	1225	48.2			21.3
AR3015020D1	508	20	819	32.25	1327	52.2			22.4
AR3015024D1	609.2	24	920.6	36.25	1531	60.3			24.6
AR3015030D1	762	30	1073	42.25	1835	72.2			27.9
AR3015036D1	914.4	36	1225.4	48.25	2139	84.2			31.2
AR3015048D1	1219.2	48	1530.4	60.25	2749	108.2			37.8



QUEENSLAND:

64 Success Street,
Acacia Ridge
(08) 3216 7855

VICTORIA:

(03) 8336 1346

info@gfr.net.au

www.gfrindustries.com.au